
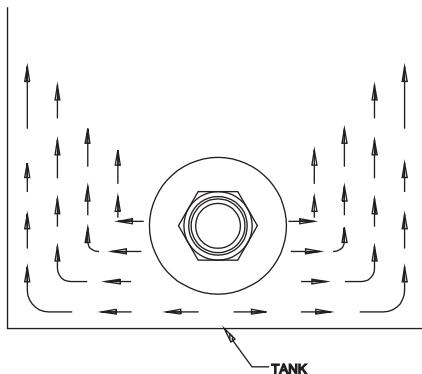
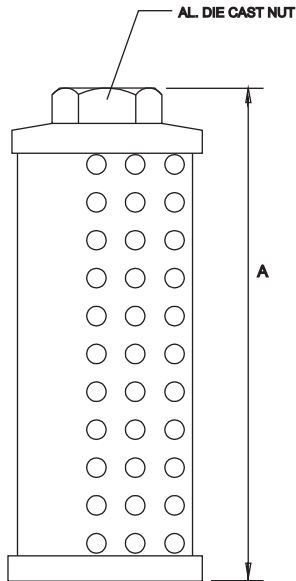


DIFFUSER

- USED IN RETURN LINE
- REDUCES DISCHARGE VELOCITY IN TWO STAGES
- MINIMISES TURBULENCE AND FOAMING
- THEREBY REDUCES AERATION / NOISE LEVEL
- MUST BE BELOW OIL LEVEL
- CAN ELIMINATE BAFFLE PLATE IN TANK
- CONSULT FACTORY FOR OPTIONAL THREADS



MODEL	PORT IN. BSPP	A	B	RATED CAPACITY LPM	WT KGS
RD3 - 050	3/4"	120	64	50	0.34
RD3 - 100	1"	125	86	100	0.38
RD3 - 200	1 - 1/4"	160	86	200	0.50
RD3 - 300	1 - 1/2"	190	86	300	0.70
RD3 - 400	2"	190	100	400	0.80
RD3 - 500	2 - 1/2"	200	150	500	0.90
RD3 - 600	3"	250	150	600	1.00

DIMENSIONS ALTERED WEF OCT 08

MODEL CODE

Rd3	050	*
SERIES	FLOW	THREADS
RD3	050 - 50 LPM	B - BSPP (STD) N - NPT
	100 - 100 LPM	
	200 - 200 LPM	
	300 - 300 LPM	
	400 - 400 LPM	
	500 - 500 LPM	
600 - 600 LPM	OPTIONAL #	

OPTIONAL / SPECIAL FEATURE - OMIT IF NOT REQUIRED