



BREATHER

THREADED TYPE




TB THREADED BREATHER

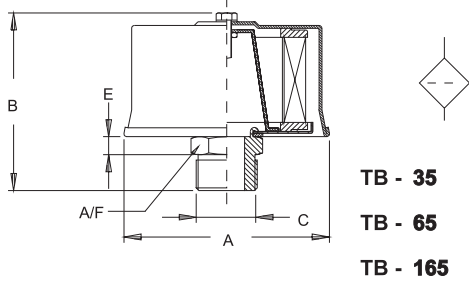

MODEL	DISPLACEMENT		RATING MICRON	A	B	C STD IN BSPP	E	A / F	WT KGS
TB . 05 .	150	LPM	40						
TB . 05 . 10	90	LPM	10	45	63	1/4"	8	25	0.13
TB . 25 .	720	LPM	40						
TB . 25 . 10	400	LPM	10	77	75	3/4"	10	30	0.25
TB . 35 .	1000	LPM	10	110	138	1 - 1/2"	12	55	0.40
TB . 65 .	2000	LPM	10	145	145	2"	15	65	0.55
TB . 165 .	4000	LPM	10	185	195	2 - 1/2"	15	80	1.30


P - FEATURE



- BUILT IN VALVE ASSEMBLY HELPS TO MAINTAIN PRESET PRESSURE (5 P S I) IN THE TANK.
- ALLOWS FREE FLOW OF AIR INTO THE TANK IF PRESSURE FALLS BELOW ATMOSPHERIC.
- IF PRESSURE INSIDE TANK INCREASES VALVE RELEASES AT PRESET PRESSURE (5 P S I)
- DISPLACED AIR IS FILTERED & CLEAN

MODEL CODE : ASSEMBLY

TB	- 05	- 10	- * * *	- P	
SERIES	CAPACITY CFM	FILTRATION MICRONS	THREADS OPTIONAL #	FEATURE SPECIAL #	
TB	05	40 - STD	03 - 3/8"	B - BSPP N - NPT	P - PRESSURISED (5 P S I) SG - SPLASH GUARD DS - DIP STICK
			04 - 1/2"		
	25	10 - OPTIONAL	06 - 3/4"		
			08 - 1"		
	35	10 - STD	10 - 1-1/4"		
	65	10 - STD			
165	10 - STD				



DIP STICK

OPTIONAL / SPECIAL FEATURE (CONSULT FACTORY) - OMIT IF NOT REQUIRED