
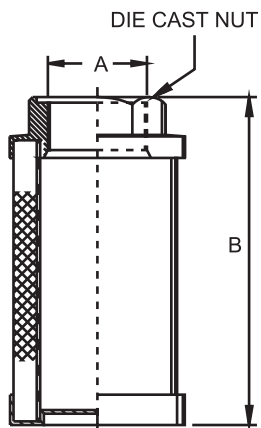


SUCTION STRAINER

- REUSABLE SS 100 MESH / 149 MICRON STD.
- ALUMINIUM DIE CAST NUT
- STEEL CAP / SUPPORT TUBE
- CONTINUOUS EPOXY BOND
- MAX. WORKING TEMP. 80° C.
- SUITABLE FOR HYDRAULIC / MINERAL OIL



MODEL NO	FLOW LPM	THREAD IN. BSPP A	OVERALL LENGTH B	DIA NUT CAP C	NUT A/F	SCREEN AREA (SQ. CMS)	WT KGS
SC3 - 002	8	1/4	90	46	24	187	0.10
SC3 - 003	12	3/8	90	46	24	187	0.10
SC3 - 005	20	1/2	105	46	30	226	0.10
SC3 - 007	28	3/4	109	64	35	406	0.20
SC3 - 010	40	1	139	64	46	542	0.20
SC3 - 015	60	1 - 1/4	139	86	51	929	0.30
SC3 - 020	80	1 - 1/2	168	86	60	1161	0.35
SC3 - 030	120	1 - 1/2	200	86	60	1393	0.40
SC3 - 040	160	2	235	100	70	1806	0.55
SC3 - 050	200	2	260	100	70	2032	0.60
SC3 - 075	300	2 - 1/2	211	150	90	2787	0.85
SC3 - 100	400	3	272	150	100	3677	1.00
SC3 - 150	600	3	345	150	100	4838	1.25

MODEL CODE : ASSEMBLY

SC3	- 010	- **	- **	- **
SERIES	SIZE	PORT THDS. OPTIONAL #	MICRONS. OPTIONAL #	FEATURE. SPECIAL #
		BSPP - STD	125 / 100MESH (STD)	RB3 - BY PASS VALVE (OPTIONAL)
		NPT - OPTIONAL	125/100/ 74 / 63 -OPTIONAL	

OMIT IF STANDARAD

CONSULT FACTORY, FOR OPTIONAL / SPECIAL FEATURE

DIMENSIONS IN MM FOR REFERENCE ONLY